

Hybrid Solar Inverter

6000W Inverter



OLV-FXC-6KW-H-P

- Max Power 6kW, power factor 1
- MPPT ranges 120V~450V, 500Voc
- High frequency inverter with small size and light weight
- Pure sine wave AC output
- Solar and utility grid can power loads at the same time
- With CAN/RS485 for BMS communication
- With the ability to work without battery
- WIFI/ GPRS remote monitoring (optional)
- Dual AC output
- Feed-in to grid



9 Inverters
in parallel



Built-in 80A
solar charger



Wide MPPT
range 120-500V

DUAL

Dual
AC Output

BMS



Support lithium/
lead-acid battery

Feed-in to grid



Lithium battery
activation



Detachable
dust cover



WiFi
monitoring



☎ 400-000-6071

🌐 www.euler-ve.com/

📍 Add: Room 906, Building J, Himalayas, Yuhua Street, Yuhuatai District, Nanjing

Specifications

◇ MODEL OLV-FXC-6KW-H-P

◇ AC INPUT	Rated Input Voltage (VAC)	208/220/230/240;L+N+PE
	Voltage Range (VAC)	90~280±3(normal mode);170~280±3 (UPS mode)
	Frequency (Hz)	50/60 (Auto Adaptive)
◇ AC OUTPUT	Max Power (kw)	6
	Peak Power (kVA)	10
	Voltage (VAC)	208/220/230/240
	Power Factor (PF)	1
	Frequency	50/60Hz±0.1%
	Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
	Wave Form	Pure Sine Wave
	Overload Capacity (Battery Mode)	60s@102%~110% load;10s@110%~130% load; 3s@130%~150%load; 0.2s@>150% load
	Max. Efficiency (Battery Mode)	93%@48VDC
◇ CHARGER (PV / AC)	Solar Charger Type	MPPT
	Max PV Input Current / input Power	18A/6000W
	MPPT Range@Operating Voltage (VDC)	120~450
	Max PV Open Circuit Voltage (VDC)	500
	Max PV Charge Current (A)	80
	Max AC Charge Current (A)	80
	Max. Charge Current (PV + AC)(A)	80
◇ BATTERY	Rated Voltage (VDC)	48
	Floating Charge Voltage (VDC)	54
	Overcharge Protection (VDC)	61
	Battery Type	Lithium and Lead -acid
◇ INTERFACE	HMI	LCD
	Interface	RS485 /RS232 / USB / Dry Contact
	Monitoring	WiFi (Optional)
◇ GENERAL DATA	Ingress Protection	IP20
	Operating Temperature	-10°C~50°C
	Relative Humidity	5%~95% (Non-condensing)
	Storage Temperature	-15°C~60°C
	Net Weight (kg)	9
	Dimensions (W*H*D)	510*306*115mm(without bracket)
	Max.Operating Altitude	4000m (Derating above 1000m)




☎ 400-000-6071

🌐 www.euler-ve.com/


📍 Add: Room 906, Building J, Himalayas,Yuhua Street,Yuhuatai District, Nanjing




System Diagram

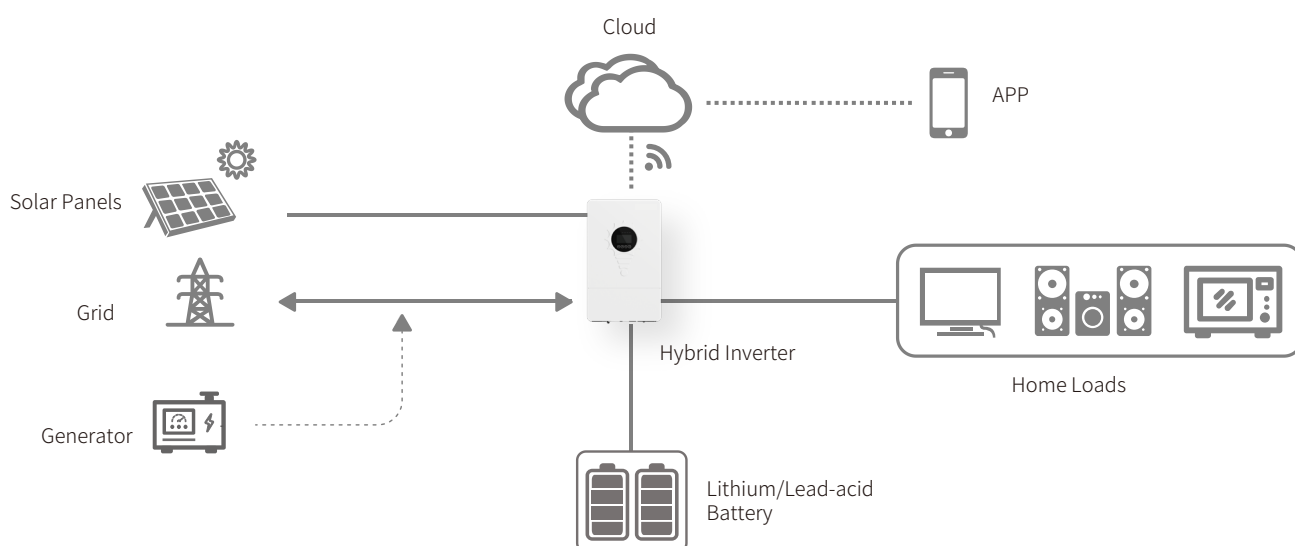

Product Overview

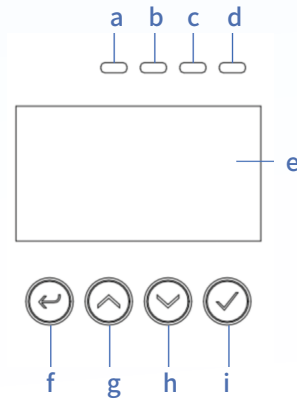

- a. AC Indicator
- b. Invert Indicator
- c. Charging Indicator
- d. Fault Indicator
- e. LCD Display
- f. ESC Button
- g. Up Button
- h. Down Button
- i. Enter Button

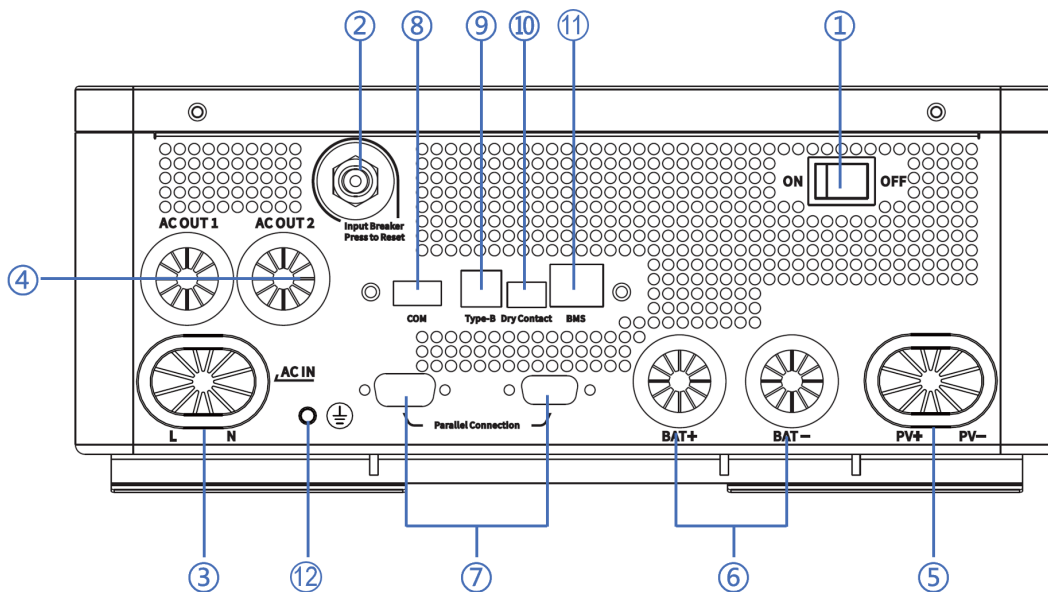

- | | | | |
|---|---------------------|----|--|
| 1 | Power On/Off Switch | 7 | Parallel Communication Ports |
| 2 | Input Breaker | 8 | WiFi/GPRS Communication Port |
| 3 | AC Input | 9 | USB Communication Port |
| 4 | Dual AC Output | 10 | Dry Contact |
| 5 | PV Input | 11 | BMS Communication Port
(Support CAN/RS485 Protocol) |
| 6 | Battery Input | 12 | PE(External Protective Grounding) |



☎ 400-000-6071

🌐 www.euler-ve.com/

📍 Add: Room 906, Building J, Himalayas, Yuhua Street, Yuhuatai District, Nanjing